

# Towards a More Adequate Use of Interval-Valued Fuzzy Techniques in Intelligent Control: A Fuzzy Analogue of Unimodality

Van Nam Huynh<sup>1</sup> and Vladik Kreinovich<sup>2</sup>

<sup>1</sup> School of Knowledge Science  
Japan Advanced Institute of Science  
and Technology JAIST  
1-1 Asahidai, Nomi  
Ishikawa 923-1292 Japan  
email huynh@jaist.ac.jp

<sup>2</sup> Department of Computer Science  
University of Texas at El Paso  
500 W. University  
El Paso, TX 79968, USA  
email vladik@utep.edu  
*Corresponding author*

**Abstract.** It is known that interval-valued fuzzy sets provide a more adequate description of expert uncertainty than the more traditional “type-1” (number-valued) fuzzy techniques. In the current approaches for using interval-valued fuzzy techniques, it is usually assumed that all fuzzy sets  $m(x) \in [\underline{m}(x), \bar{m}(x)]$  are possible. In this paper, we show that it is reasonable to restrict ourselves only to fuzzy numbers  $m(x)$ , i.e., “unimodal” fuzzy sets. We also describe feasible algorithms for implementing thus modified intelligent control.

**Keywords:** interval-valued fuzzy sets, fuzzy control, fuzzy numbers, unimodality, defuzzification, feasible algorithm


## 1 Introduction

**Need for intelligent control.** In many practical control situations, there is a small number of experts skilled in the corresponding control. Since there are only a few such skilled experts, they are unable to personally control all needed situations. It is therefore desirable to design an automated system that would implement their expertise.

**Need to use fuzzy sets.** Experts are often only able to describe their control by using imprecise (*fuzzy*) words from natural language such as “small” or “close to 0”. To translate such knowledge into a numerical strategy, Zadeh invented fuzzy logic. For each natural-language property  $P$  like “small” and for every possible value  $x$  of the corresponding quantity, an expert is often not 100% certain whether  $x$  satisfies the property  $P$ . We describe his or her certainty by a

degree  $m(x)$  from the interval  $[0, 1]$ . These degrees form a *fuzzy set*. To be a more precise, a fuzzy set is usually defined as a function  $m$  which maps all possible values of the corresponding quantity into the interval  $[0, 1]$ ; see, e.g., [2, 7]. The function  $m$  is also called a *membership function*.

**“Unimodular” fuzzy sets – fuzzy numbers.** Usually, fuzzy sets are “unimodular” in the sense that the corresponding membership function  $m(x)$  first (non-strictly) increases (usually, from 0 to 1), and then (non-strictly) decreases (usually, from 1 to 0). Such fuzzy sets are also known as *fuzzy numbers*.

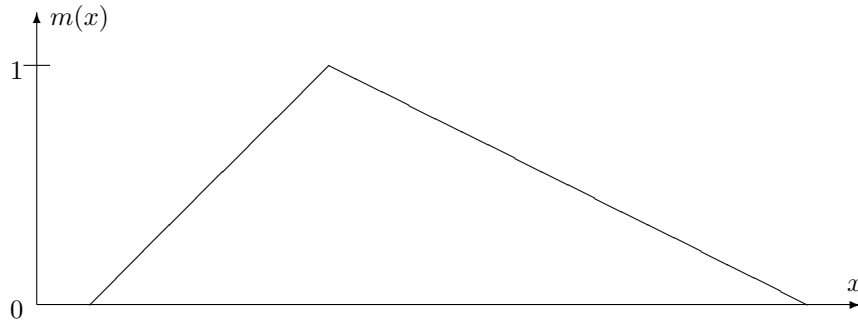


**Need for a defuzzification.** Based on the expert’s rules and the formulas of fuzzy logic, we translate the fuzzy sets corresponding to the natural-language terms into a fuzzy set that describes reasonable control values. Since we want a single control values, we must use a special *defuzzification* procedure.


Usually, a *centroid* defuzzification is used, in which we transform a membership function  $m(x)$  into the “centroid” value

$$u = \frac{\int x \cdot m(x) dx}{\int m(x) dx}. \quad (1)$$

**Need for interval-valued fuzzy sets.** In practice, just like an expert cannot be 100% sure whether a given value  $x$  is small, this same expert cannot describe her degree of certainty by an exact number. At best, she can produce an interval  $[\underline{m}(x), \overline{m}(x)]$  of possible values. As a result, we get *interval-valued* fuzzy sets; see, e.g., [5, 6].

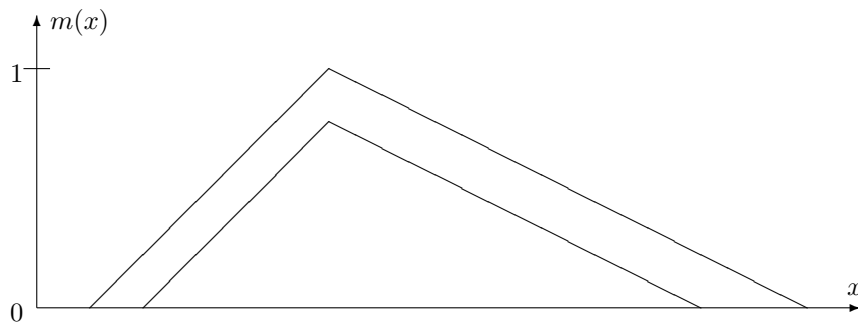

The resulting interval-valued fuzzy set can be viewed as a class of all fuzzy sets  $m$  for which, for every  $x$ , the value  $m(x)$  is within this interval:

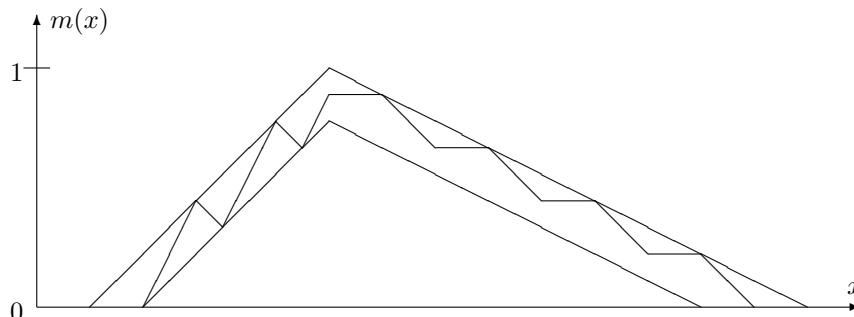

**How to defuzzify an interval-valued fuzzy set.** As a result of defuzzifying an interval-valued fuzzy set  $[\underline{m}(x), \overline{m}(x)]$ , it is thus reasonable to take the interval formed by the results of defuzzifying all fuzzy sets  $m(x) \in [\underline{m}(x), \overline{m}(x)]$ .

Efficient algorithms have been designed for computing this interval; see, e.g., [3–6]. These algorithms and the main ideas behind these intervals are presented in the following text.

**Problem.** As we will see, the endpoints of these intervals are sometimes only attained for un-natural fuzzy sets – which are not fuzzy numbers.

*What we do in this paper.* In this paper, we propose to restrict ourselves to fuzzy numbers  $m(x)$ , and we design a feasible algorithm for computing the resulting (narrower) interval.

## 2 Algorithm for Defuzzification of Interval-Valued Fuzzy Sets: Reminder

**Need to describe the algorithm and its motivations.** Since our objective is to explain the problems with the existing defuzzification algorithm for interval-valued fuzzy sets, and to propose a modified algorithm that solves these problems, let us first describe this algorithm – and the motivations behind this algorithm.

**How can we represent a generic membership function in a computer.** We are interested in producing the algorithm for defuzzification. The input to this algorithm is a membership function. So, to describe the algorithm, we first need to describe how we can represent a generic membership function  $m(x)$  in a computer.

Some membership functions are determined by their analytical (or algorithmic) expression. For example, a piece-wise linear membership function pictured above can be represented by explicit formulas for its linear parts. However, for a generic membership function, there is no analytical or algorithmic expressions.

Instead, from experts, we get the degrees  $m(x_i)$  to which different values  $x_i$  are possible. In practice, we can only ask a finite number of questions to an expert, so we have only finitely many values  $x_i$ .

It is therefore reasonable to represent the “input” membership functions – describing such terms as “small” – by their values at a finite number of points.

Usually, a membership function  $m(x)$  is represented by its values  $m_i \stackrel{\text{def}}{=} m(x_i)$  on a uniform grid  $x_i = x_0 + i \cdot h$  for some  $h > 0$ .

**How to describe centroid defuzzification under this representation.**

When we know the values  $m_i = m(x_i)$  of a function  $m(x)$  on a grid, a natural way to approximate an integral  $\int m(x) dx$  of this function is by using the corresponding integral sum:  $\int m(x) dx \approx \sum_{i=1}^n m(x_i) \cdot \Delta x_i$ , where  $\Delta x_i = x_{i+1} - x_i = h$ . In other words, the resulting integral sum is simply proportional to the sum of the corresponding values:  $\int m(x) dx \approx h \cdot \sum_{i=1}^n m_i$ .

Similarly, the integral in the numerator of the centroid formula can be approximated as  $\int x \cdot m(x) dx \approx h \cdot \sum_{i=1}^n x_i \cdot m_i$ . When we divide this integral sum by the previous one, the factors  $h$  in the numerator and in the denominator cancel each other, so we end up with the following formula for the result  $u$  of centroid defuzzification:

$$u = \frac{\sum_{i=1}^n x_i \cdot m_i}{\sum_{i=1}^n m_i}. \quad (2)$$

**Towards defuzzification for interval-valued fuzzy sets.** In the interval-valued case, for every  $i$ , instead of the exact value of  $m_i$ , we only know the interval  $[\underline{m}_i, \overline{m}_i]$  of possible values of  $m_i$ , where  $\underline{m}_i \stackrel{\text{def}}{=} \underline{m}(x_i)$  and  $\overline{m}_i \stackrel{\text{def}}{=} \overline{m}(x_i)$ .

For different values  $m_i \in [\underline{m}_i, \overline{m}_i]$ , we get, in general, different values of  $u$ . Our objective is to find the range of possible value of  $u$  when  $m_i \in [\underline{m}_i, \overline{m}_i]$ .

The function (2) is continuous; thus, its range on a connected closed bounded box  $[\underline{m}_1, \overline{m}_1] \times \dots \times [\underline{m}_n, \overline{m}_n]$  is an interval. We will denote the endpoints of this interval by  $\underline{u}$  and  $\overline{u}$ . Thus, to find the range, it is sufficient to find the smallest possible and the largest possible values of the expression (2) under the condition  $m_i \in [\underline{m}_i, \overline{m}_i]$ .

**Derivation of the formula for  $\overline{u}$ .** Let us start with the maximum. Let  $\tilde{m}_1, \dots, \tilde{m}_n$  be the values at which the maximum is attained. It is well known, from calculus, that when maximum is attained inside the interval  $\tilde{m}_i \in (\underline{m}_i, \overline{m}_i)$ , then the corresponding partial derivative  $\frac{\partial u}{\partial m_i}$  is equal to 0.

When the maximum is attained at  $\tilde{m}_i = \underline{m}_i$ , then we cannot have  $\frac{\partial u}{\partial m_i} > 0$ , since then, for some small  $\varepsilon > 0$ , the value at  $m_i = \tilde{m}_i + \varepsilon$  will be even larger. Thus, we must have  $\frac{\partial u}{\partial m_i} \leq 0$ .

Similarly, when the maximum is attained at  $\tilde{m}_i = \overline{m}_i$ , then we cannot have  $\frac{\partial u}{\partial m_i} < 0$ , since then, for some small  $\varepsilon > 0$ , the value at  $m_i = \tilde{m}_i - \varepsilon$  will be even larger. Thus, we must have  $\frac{\partial u}{\partial m_i} \geq 0$ .

The partial derivative of the expression (2) is straightforward to compute: it is equal to

$$\frac{\partial}{\partial m_i} \left( \frac{\sum_{j=1}^n x_j \cdot m_j}{\sum_{j=1}^n m_j} \right) = \frac{x_i \cdot \left( \sum_{j=1}^n m_j \right) - \sum_{j=1}^n x_j \cdot m_j}{\left( \sum_{j=1}^n m_j \right)^2} = \frac{x_i - \bar{u}}{\sum_{j=1}^n m_j}.$$

Since all the values of  $m_j$  of the membership function are non-negative, the sign of the partial derivative coincides with the sign of the difference  $x_i - \bar{u}$ .

Thus, we arrive at the following conclusions:

- if  $\underline{m}_i < \tilde{m}_i < \overline{m}_i$ , then  $x_i = \bar{u}$ ;
- if  $\tilde{m}_i = \underline{m}_i$ , then  $x_i \leq \bar{u}$ ;
- if  $\tilde{m}_i = \overline{m}_i$ , then  $x_i \geq \bar{u}$ .

So, if  $x_i < \bar{u}$ , we cannot have  $\underline{m}_i < \tilde{m}_i < \overline{m}_i$  and we cannot have  $\tilde{m}_i = \overline{m}_i$ , so the only remaining possibility is  $\tilde{m}_i = \underline{m}_i$ .

Similarly, if  $x_i > \bar{u}$ , we cannot have  $\underline{m}_i < \tilde{m}_i < \overline{m}_i$  and we cannot have  $\tilde{m}_i = \underline{m}_i$ , so the only remaining possibility is  $\tilde{m}_i = \overline{m}_i$ .

It should be mentioned that when  $x_i = \bar{u}$ , then replacing  $\tilde{m}_i$  with any other value  $m_i \in [\underline{m}_i, \overline{m}_i]$  does not change the expression (2) and thus, for this particular  $i$ , we can pick any value  $m_i \in [\underline{m}_i, \overline{m}_i]$ .


Thus, we arrive at the following formula.

**Resulting formula for  $\bar{u}$ .** In the discrete case, the maximum  $\bar{u}$  is attained when we choose  $m_i = \underline{m}_i$  for all  $i$  for which  $x_i < \bar{u}$  and  $m_i = \overline{m}_i$  for all  $i$  for which  $x_i \geq \bar{u}$ :

$$\bar{u} = \frac{\sum_{i: x_i < \bar{u}} x_i \cdot \underline{m}_i + \sum_{j: x_j \geq \bar{u}} x_j \cdot \overline{m}_j}{\sum_{i: x_i < \bar{u}} \underline{m}_i + \sum_{j: x_j \geq \bar{u}} \overline{m}_j}. \quad (3)$$

Similarly, in the continuous case, the maximum  $\bar{u}$  is attained when we choose  $m(x) = \underline{m}(x)$  for all  $x < \bar{u}$  and  $m(x) = \overline{m}(x)$  for all  $x \geq \bar{u}$ :

$$\bar{u} = \frac{\int_{-\infty}^{\bar{u}} x \cdot \underline{m}(x) dx + \int_{\bar{u}}^{\infty} x \cdot \overline{m}(x) dx}{\int_{-\infty}^{\bar{u}} \underline{m}(x) dx + \int_{\bar{u}}^{\infty} \overline{m}(x) dx}. \quad (4)$$

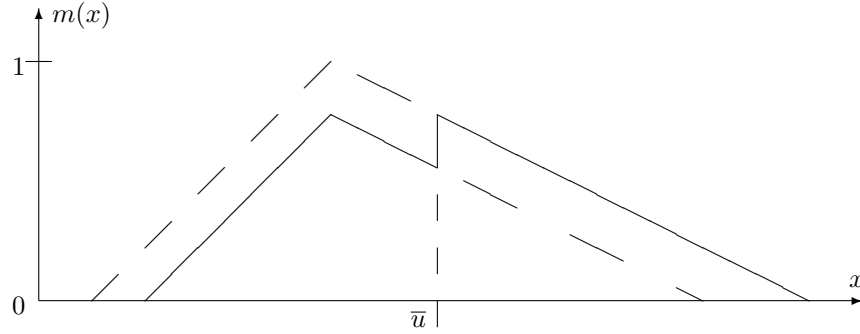


**Resulting formula for  $\underline{u}$ .** Similarly, we can conclude that in the discrete case, the minimum  $\underline{u}$  is attained when we choose  $m_i = \bar{m}_i$  for all  $i$  for which  $x_i < \underline{u}$  and  $m_i = \underline{m}_i$  for all  $i$  for which  $x_i \geq \underline{u}$ :

$$\underline{u} = \frac{\sum_{i:x_i < \underline{u}} x_i \cdot \bar{m}_i + \sum_{j:x_j \geq \underline{u}} x_j \cdot \underline{m}_j}{\sum_{i:x_i < \underline{u}} \bar{m}_i + \sum_{j:x_j \geq \underline{u}} \underline{m}_j}. \quad (5)$$

In the continuous case, the minimum  $\underline{u}$  is attained when we choose  $m(x) = \bar{m}(x)$  for all  $x < \underline{u}$  and  $m(x) = \underline{m}(x)$  for all  $x \geq \underline{u}$ :

$$\underline{u} = \frac{\int_{-\infty}^{\underline{u}} x \cdot \bar{m}(x) dx + \int_{\underline{u}}^{\infty} x \cdot \underline{m}(x) dx}{\int_{-\infty}^{\underline{u}} \bar{m}(x) dx + \int_{\underline{u}}^{\infty} \underline{m}(x) dx}. \quad (6)$$

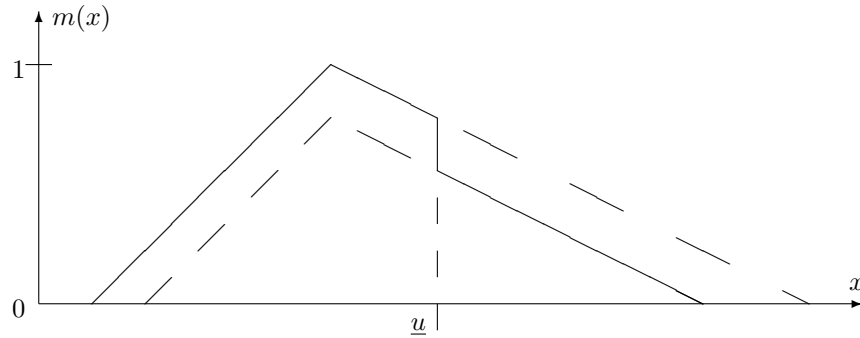

**How can we actually compute  $\bar{u}$  and  $\underline{u}$ : analytical case.** For the case when  $\underline{m}(x)$  and  $\bar{m}(x)$  are given by analytical formulas, we can explicitly integrate both numerator and denominator and get algebraic equations for the unknown values  $\bar{u}$  or  $\underline{u}$ .

**How can we actually compute  $\bar{u}$  and  $\underline{u}$ : towards an algorithm for the general case.** How can we perform these computations in the general case? The above formulas (3) and (5) require that we know  $\bar{u}$  and  $\underline{u}$  in order to find the appropriate values  $m_i \in [\underline{m}_i, \bar{m}_i]$ . Thus, the above formulas do not directly lead to an efficient algorithm for computing  $\bar{u}$  and  $\underline{u}$ .

The possibility to efficiently compute  $\bar{u}$  and  $\underline{u}$  comes from the fact that, e.g., in the formula (3), all we need to know is where exactly  $\bar{u}$  is in comparison with the values  $x_1 < x_2 < \dots < x_n$ . For simplicity, let us supplement these values with  $x_0 = -\infty$  and  $x_{n+1} = +\infty$ . Then, the real line is divided into  $n + 1$  (finite or infinite) intervals  $(x_k, x_{k+1}]$ ,  $k = 0, 1, \dots, n$ . So, to find  $\bar{u}$ , it is sufficient to try all these  $n + 1$  intervals.

We will describe the arguments in details for the case of the maximum. For the minimum, the arguments are similar.

If  $x_k < \bar{u} \leq x_{k+1}$ , then the formula (3) can be rewritten as  $\bar{u} = \bar{u}_k \stackrel{\text{def}}{=} \frac{\bar{N}_k}{\bar{D}_k}$ , where

$$\bar{N}_k \stackrel{\text{def}}{=} \sum_{i=1}^k x_i \cdot \underline{m}_i + \sum_{j=k+1}^n x_j \cdot \bar{m}_j,$$

and

$$\bar{D}_k \stackrel{\text{def}}{=} \sum_{i=1}^k \underline{m}_i + \sum_{j=k+1}^n \bar{m}_j.$$

We only need to consider values  $k$  for which  $x_k < \bar{u}_k \leq x_{k+1}$ .

So, we compute the ratios  $\bar{u}_k$  for all  $k$ , keep only those ratios for which the inequality  $x_k < \bar{u}_k \leq x_{k+1}$  is satisfied, and then return the largest of the kept ratios  $\bar{u}_k$  as the desired value of  $\bar{u}$ .

**Computational complexity of the resulting algorithm: discussion.** How many computational steps do we need to perform these computations? For the standard defuzzification (2), we need to perform a liner number of steps  $O(n)$ :  $n$  multiplications and  $n - 1$  additions to compute the numerator,  $n - 1$  additions to compute the denominator, and 1 division to compute the ratio  $u$ . Let us show that we can compute  $\bar{u}$  in linear time as well.

For  $k = 0$ , we can compute  $\bar{N}_0$  and  $\bar{D}_0$  in linear time. Then, when we move from  $\bar{N}_k$  to  $\bar{N}_{k+1}$  (or from  $\bar{D}_k$  to  $\bar{D}_{k+1}$ ), we only to change one term, so we only need a finite number of steps. Thus, to find all  $n$  ratios, we only need a linear number of steps.

Let us summarize the resulting algorithm.

**Algorithm for computing  $\bar{u}$ .**

- First, we compute  $\bar{N}_0 = \sum_{j=1}^n x_j \cdot \bar{m}_j$  and  $\bar{D}_0 = \sum_{j=1}^n \bar{m}_j$ .
- Then, for  $k = 1, 2, \dots, n$ , we compute  $\bar{N}_{k+1} = \bar{N}_k - x_k \cdot (\bar{m}_k - \underline{m}_k)$  and  $\bar{D}_{k+1} = \bar{D}_k - (\bar{m}_k - \underline{m}_k)$ .

- For each  $k$ , we compute the ratio  $\bar{u}_k = \frac{\bar{N}_k}{\bar{D}_k}$ , and check whether

$$x_k < \bar{u}_k \leq u_{k+1};$$

if this inequality is satisfied, we keep  $\bar{u}_k$  as a possible value.

- The largest of these possible values is then returned as  $\bar{u}$ .

*Comment.* A similar efficient (linear time) algorithm can be used to compute  $\underline{u}$ .

#### Algorithm for computing $\underline{u}$ .

- First, we compute  $\underline{N}_0 = \sum_{j=1}^n x_j \cdot \underline{m}_j$  and  $\underline{D}_0 = \sum_{j=1}^n \underline{m}_j$ .
- Then, for  $k = 1, 2, \dots, n$ , we compute  $\underline{N}_{k+1} = \underline{N}_k + x_k \cdot (\bar{m}_k - \underline{m}_k)$  and  $\underline{D}_{k+1} = \underline{D}_k + (\bar{m}_k - \underline{m}_k)$ .
- For each  $k$ , we compute the ratio  $\underline{u}_k = \frac{\underline{N}_k}{\underline{D}_k}$ , and check whether

$$x_k < \underline{u}_k \leq u_{k+1};$$

if this inequality is satisfied, we keep  $\underline{u}_k$  as a possible value.

- The smallest of these possible values is then returned as  $\underline{u}$ .

### 3 Towards a More Adequate Defuzzification

**The problem.** The problem is that,

- as we have mentioned earlier, it is often reasonable to restrict ourselves to fuzzy numbers (unimodal fuzzy sets),
- while, as we have seen, the maximum and/or minimum of the value  $u$  is sometimes attained at a membership function which is not unimodal.

It is therefore desirable to find the maximum and the minimum of  $u$  only among *unimodal* values  $m_i$ , i.e., values which  $m_i$  first (non-strictly) increase) and then (non-strictly) decreases.

**The problem reformulated in precise mathematical terms.** In precise terms, we are only interested in finding the maximum and the minimum of the expression (2) among all the values  $m_1, \dots, m_n$  for which, for some “mode location”  $\ell = 1, 2, \dots, n$ , we have

$$m_1 \leq m_2 \leq \dots \leq m_{\ell-1} < m_\ell \geq m_{\ell+1} \geq \dots \geq m_{n-1} \geq m_n.$$

Let us denote the corresponding minimum and maximum by  $\underline{u}_a$  and  $\bar{u}_a$  (where  $a$  stands for “adequate”).

**Towards a solution of the problem.** Let us fix the values  $\bar{u}_a$  and  $\ell$  and see how we can use the inequalities corresponding to this value.



When  $x_i < \bar{u}_a$ , then, as we mentioned earlier, the derivative  $\frac{\partial u}{\partial m_i}$  is negative and thus, we cannot decrease  $\tilde{m}_i$ . In the past, we only had one restriction: that  $m_i \geq \underline{m}_i$ . Now, we have additional restrictions: e.g., for  $i \leq \ell$ , that  $m_i \geq m_j$  for all  $j < i$ . Thus, the fact that we cannot decrease  $m_i$  means that either  $\tilde{m}_i = \underline{m}_i$  or that  $\tilde{m}_i = \tilde{m}_j$  for some  $j < i$ . In the second case, for  $\tilde{m}_j$ , we can repeat the same argument, and eventually, we will find that  $\tilde{m}_i = \tilde{m}_j$  for some value  $j$  which cannot be decreased because it is equal to  $\tilde{m}_j = \underline{m}_j$ . Thus, we have  $\tilde{m}_i = \underline{m}_j$ .

In general, since  $i \leq \ell$ , we have  $\tilde{m}_i \geq \tilde{m}_j \geq \underline{m}_j$ . Thus, we have  $\tilde{m}_i \geq \max(\underline{m}_1, \dots, \underline{m}_i)$ . Since we concluded that  $\tilde{m}_i$  is equal to one of these lower endpoints, it cannot be larger than the largest of them, so we have  $\tilde{m}_i = \max(\underline{m}_1, \dots, \underline{m}_i)$ .

For  $i > \ell$ , we may also have  $\tilde{m}_i = \bar{m}_j$  for some  $j$  for which  $x_j > \bar{v}_a$ . In this case, the values  $m_k$  between  $i$  and  $j$  are constant.

Thus, the “past-mode” part ( $i > \ell$ ) of the optimal solution can be divided into three zones:

- first, there is a zone  $[\ell, s]$  ( $s$  for *start*) before  $\bar{v}_a$  where we have


$$\tilde{m}_i = \max(\underline{m}_i, \dots, \underline{m}_s);$$

- then, there is a zone  $[e, n]$  ( $e$  for *end*) past  $\bar{v}_a$  where we have

$$\tilde{m}_i = \min(\bar{m}_i, \dots, \bar{m}_n);$$

- finally, in the zone between  $s$  and  $e$ , the values are constant.

So, to describe all such solutions, it is sufficient to try all possible values of three indices:  $\ell$ ,  $s$  and  $e$ .

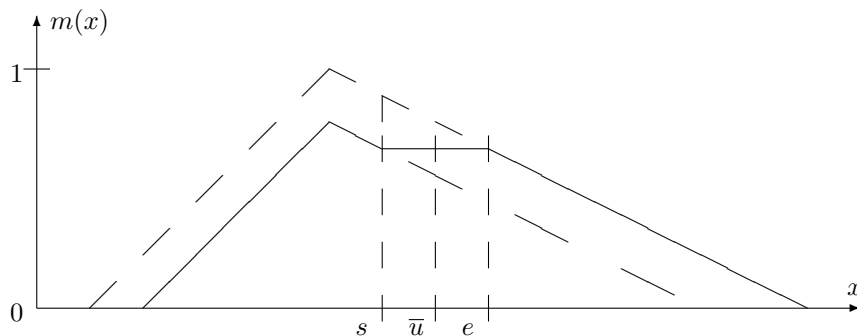

### Resulting algorithm for computing $\bar{u}_a$ .

- First, for all  $i$  and  $j$ , we compute  $m_{ij}^- \stackrel{\text{def}}{=} \max(\underline{m}_i, \dots, \underline{m}_j)$  and  $m_{ij}^+ \stackrel{\text{def}}{=} \min(\bar{m}_i, \dots, \bar{m}_j)$ . For each  $i$ , computing the next value  $m_{ij}^\pm$  from the previous one requires one step, all these values can be computed in time  $O(n^2)$ .

- Second, for each of  $n^3$  possible combinations of three integers  $\ell \leq s < e$ , we take  $m_i = m_{1i}^-$  for  $i < \ell$ ,  $m_i = m_{is}^-$  for  $\ell \leq i \leq s$ ,  $m_i = m_{in}^+$  for  $i \geq e$ , and  $m_i = \text{const} \in [m_e, m_s]$  for  $i \in (e, s)$ .
- We check whether all these values satisfy the conditions  $m_i \in [\underline{m}_i, \overline{m}_i]$ , and if yes, we compute the ratio  $u$ .
- The largest of these values is returned as the desired upper bound  $\bar{u}_a$ .

**Computational complexity.** For each of  $O(n^3)$  combinations of values, we need linear time to compute the ratio  $u$ . Thus, totally, we need  $O(n^3) \cdot O(n) = O(n^4)$  steps. This is still polynomial time, i.e., this algorithm is still feasible; see, e.g., [1].

*Comment.* A similar algorithm can be described for computing  $\underline{u}_a$ .

**Algorithm for computing  $\underline{u}_a$ .**

- For each of  $n^3$  possible combinations of three integers  $s \leq e \leq \ell$ , we take  $m_i = m_{in}^-$  for  $i > \ell$ ,  $m_i = m_{si}^-$  for  $s \leq i \leq \ell$ ,  $m_i = m_{1i}^+$  for  $i \leq s$ , and  $m_i \in [m_e, m_s]$  for  $i \in (e, s)$ .
- We check whether all these values satisfy the conditions  $m_i \in [\underline{m}_i, \overline{m}_i]$ , and if yes, we compute the ratio  $u$ .
- The smallest of these values is returned as the desired lower bound  $\underline{u}_a$ .

## Acknowledgments

This work was supported in part by NSF grant HRD-0734825, by Grant 1 T36 GM078000-01 from the National Institutes of Health, and by the Japan Advanced Institute of Science and Technology (JAIST) International Joint Research Grant 2006-08.

## References

1. Cormen, T. H., Leiserson, C. E., Rivest, R. L., Stein, C.: *Introduction to Algorithms*, MIT Press, Cambridge, Massachusetts, 2001.
2. Klir, G., Yuan, B.: *Fuzzy Sets and Fuzzy Logic*, Prentice Hall, New Jersey, 1995.
3. Kreinovich, V., Lakeyev, A., Rohn, J., Kahl, P.: *Computational Complexity and Feasibility of Data Processing and Interval Computations*, Kluwer Academic Press, 1998.
4. Lea, R., Kreinovich, V., Trejo, R.: “Optimal interval enclosures for fractionally-linear functions, and their application to intelligent control”, *Reliable Computing* 2(3):265–286, 1996.
5. Mendel, J. M.: *Uncertain Rule-Based Fuzzy Logic Systems: Introduction and New Directions*, Prentice-Hall, 2001.
6. Mendel, J. M.: “Type-2 fuzzy sets and systems: an overview”, *IEEE Computational Intelligence Magazine* 2:20–29, 2007.
7. Nguyen, H. T., Walker, E. A.: *First Course in Fuzzy Logic*, CRC Press, Boca Raton, Florida, 2006.